



भा. कृ. अनु. प. –केन्द्रीय शुष्क क्षेत्र अनुसंधानसंस्थान
ICAR - Central Arid Zone Research Institute
 जोधपुर (राजस्थान) 342 003 / **Jodhpur (Rajasthan) 342 003**
Website: www.cazri.res.in, Email: director.cazri@icar.gov.in
 Phone No. 0291 – 2786584(Dir.)/2786485(CAO)/2785981(AO) FAX: 0291 – 2788706(Dir.)/2786498(PME)



F.No. 17(2) Repair & Renovation of Lab./DBT/19-20/Adm.V

Dated: 21.05.2019

To,

M/S.....

.....

.....

JODHPUR.

Sub: Quotation for Repair and Renovation of Biotechnology Lab at Div-III, ICAR- CAZRI, Jodhpur under DBT Project Code No. 4001 633.

Dear Sir(s),

You are requested to kindly quote your lowest rates keeping in view the following conditions in respect of the articles indicated overleaf/as per statement enclosed (Schedule to tender).

1. No advance payment will be made. However, the payment is normally made within 30 days from the date of receipt of Bill for execution the work **in good condition as per order**.
2. The quantity proposed in the quotation may be increased or decreased at the discretion of the authority while placing the order.
3. Quotation not found according to specification will be rejected/not considered.
4. The firm should also supply a copy of the authorized dealership certificate of the item, if applicable
5. Quotation should remain valid for 3 months from the date of quotation.
6. No. Form 'C' & 'D' for sales tax will be issued. Payment will be made at full rate, if applicable. However, the firm is required to produce the valid sales tax Registration No. The firm should also indicate PAN/TIN as per Income Tax Rules.
7. The Rates **should be clearly indicated in figure as well as in words**. While quoting the rates, it may be clearly indicated whether the items are inclusive or exclusive of ST, CST etc. in terms of percentage or in absolute term.
8. Works will have to be completed normally within 30 days from the date of issue of work order or as mentioned in the supply order unless such extension is allowed by the Institute **failing which suitable penalty as indicated in the work order will be imposed**.
9. Director, CAZRI, Jodhpur reserves the right to accept or reject any or all the quotation without assigning any reason.
10. All bids must be accompanied by a bid security / **EMD of Rs. 3000/-**of the estimated value of the cost, in the form of a Demand Draft of a scheduled commercial bank in India, in favour of **ICAR Unit-CAZRI, Jodhpur**. Without EMD quotation will not be considered.
11. The firm awarded the contract may/will have to furnish a performance security in the form of Bank Guarantee as per the proforma to be supplied along with work order or FDR pledged to "**ICAR Unit - CAZRI, Jodhpur**" from a scheduled Commercial Banks for an amount which may vary from 5% to 10% of the value of the contract at the discretion of Director, which should remain valid for six months.
12. The quotation may be sent to the office by courier/Registered Post/Speed Post in sealed cover super scribed with Repair and Renovation of Biotechnology Lab at Div-III, ICAR- CAZRI, Jodhpur under DBT Project Code No. 4001 633.
13. The quotation must be reached to this Office on or before **03.06.2019 at 3.00 PM** which it will not be considered. The quotation should be dropped in the Tender Box placed in the Adm.V.

Yours faithfully,

ASSISTANT ADMINISTRATIVE OFFICER (V)



निविदाप्रपत्र

(इस फार्म को निविदा प्रपत्र के साथ जमा कराना आवश्यक है)

निदेशक, केन्द्रीय शुष्क क्षेत्र अनुसंधान संस्थान, जोधपुर निम्नलिखित कार्य के लिए सीमित मोहरबन्द निविदाये आमंत्रित करते हैं।

1. कार्य कानाम : Repair and Renovation of Biotechnology Lab at Div-III, ICAR-CAZRI, Jodhpur under DBT Project Code No. 4001 633.
2. निविदादाता फर्म का नाम/पूर्ण पता :
3. टेलीफोन/मोबाईल नम्बर :
4. निविदादाता फर्म का : PAN No.
: GST/TIN No.
5. बैंक का विवरण : बैंक का नाम.....
: पता
: बैंक का IFSCCode :
: बैंक का खाता नम्बर:.....
6. निविदा प्रपत्र की कीमत : रु. शून्य
7. धरोहर (बयाना)राशि : रु. 3000/-
8. कार्य पूर्ण करने की अवधि : एक माह
9. निविदा जमा कराने की अंतिम तिथि : 03.06.2019 at 3.00 PM
10. निविदा कार्य की विस्तृत सूचना काजरी की वेबसाईट <http://www.cazri.res.in> पर देखी जा सकती है।
11. निविदा प्रपत्र काजरी, जोधपुर की वेबसाईट से भी डाउनलोड किये जा सकते हैं।

निविदादाता के मोहर सहित हस्ताक्षर



Name of work:-Repair & Renovation of Lab (Providing and Fixing of False ceiling including LED Lights & Aluminium work for covering of windows and ventilators of Biotechnology Lab) at,Div.-III, ICAR- CAZRI, Jodhpur

Sl. No.	Code No	Description	Qty	Unit	Rate	Amount
1	12.45	Providing and fixing at all height false ceiling including providing and fixing of frame work made of special sections power pressed from M.S. sheet and galvanised in accordance with zinc coating of grade 350 as per IS : 277 and consisting of angle cleats of size 25mm wide x 1.6mm thick with flanges of 22mm and 37mm at 1200mm centre to centre one flange fixed to the ceiling with dash fastener 12.5mm diax40mm long with 6mm dia bolts to the angle hangers of 25x25x0.55mm of required length, and other end of angle hanger being fixed with nut and bolts to				
		G.I. channels 45x15x0.9mm running at the rate of 1200mm centre to centre to which the ceiling section 0.5mm thick button wedge of 80mm with tapered flanges of 26mm each having clips of 10.5mm at 450mm centre to centre shall be fixed in a direction perpendicular to G.I. channel with connecting clips made out of 2.64mm diax230mm long G.I. wire at every junction including fixing the gypsum board with ceiling section and perimeter channels 0.5mm thick 27mm high having flanges of 20mm and 30mm long, the perimeter of ceiling fixed to wall/partition with the help of rawl plugs at 450mm centre to centre with 25mm long drive-all screws @ 230mm interval including jointing and fixing to a				
		flush finish of tapered and square edges of the board with recommended filler, jointing tapes, finisher and two coats of primer suitable for board as per manufactures specification and also including the cost of making openings for light fittings, grills, diffusers, cutouts made with frame of perimeter channels suitably fixed all complete as per drawing and specification and direction of the Engineer in Charge but excluding the cost of painting with :				
	12.45.1	12.5 mm thick tapered edge gypsum board conforming to IS: 2095- Part I.	62	sqm	@.....	
2	21.1	Providing and fixing aluminium work for doors, windows, ventilators and partitions with extruded built up standard tubular sections/ appropriate Z sections and other sections of approved make conforming to IS: 733 and IS : 1285, fixed with rawl plugs and screws or with fixing clips, or with expansion hold fasteners including necessary filling up of gaps at junctions, at top, bottom and sides with required PVC/neoprene felt etc. Aluminium sections shall be smooth, rust free, straight, mitred and jointed mechanically wherever required including cleat angle, Aluminium snap beading for glazing / paneling, C.P. brass / stainless steel screws, all complete as per architectural drawings and the directions of Engineer-in-charge.				
	21.1.1	For fixed portion				
	21.1.1.1	Anodised aluminium (anodised transparent or dyed to required shade according to IS: 1868, Minimum anodic coating of grade AC 15)	30	kg	@.....	
	21.1.2	For shutters of doors, windows & ventilators including providing and fixing hinges/ pivots and making provision for fixing of fittings wherever required including the cost of PVC / neoprene gasket required				

	21.1.2.1	Anodised aluminium (anodised transparent or dyed to required shade according to IS: 1868, Minimum anodic coating of grade AC 15)	31.35	Kg.	@.....	
3	13.41	Distemping with oil bound washable distemper of approved brand and manufacture to give an even shade				
	13.41.1	New work (two or more coats) over and including water thinnable priming coat with cement primer.	50	sqm	@.....	
4	13.8	15mm cement plaster on rough side of single or half brick wall finished with a floating coat of neat cement of mix:				
	13.8.1	1:3 (1 cement: 3 fine sand)	3	sqm	@.....	
5		Providing and Fixing of 36 Watt 600X600mm LED Fitting	8	No.	@.....	
Total						

(Rupees only)

Signature with seal of tenderer

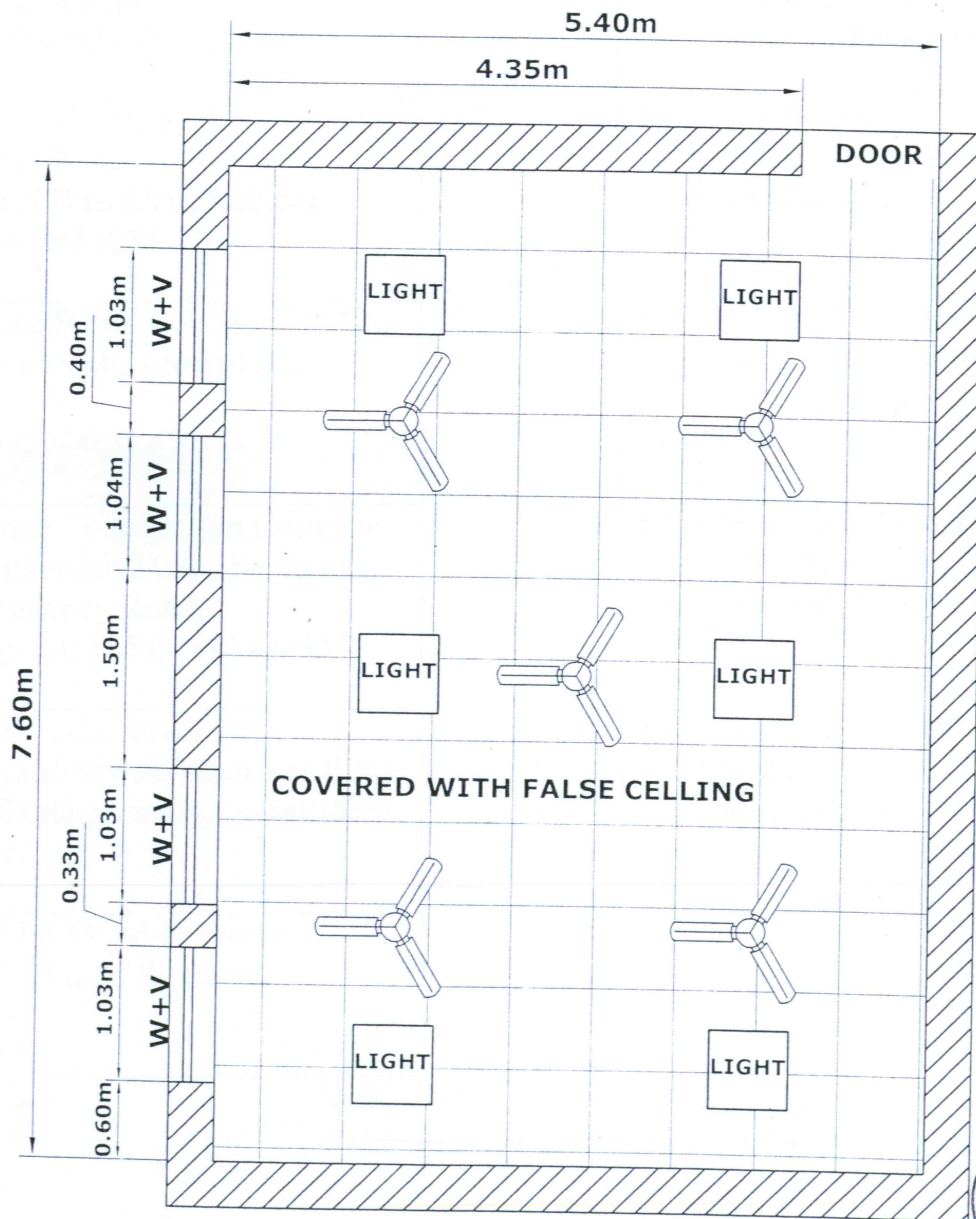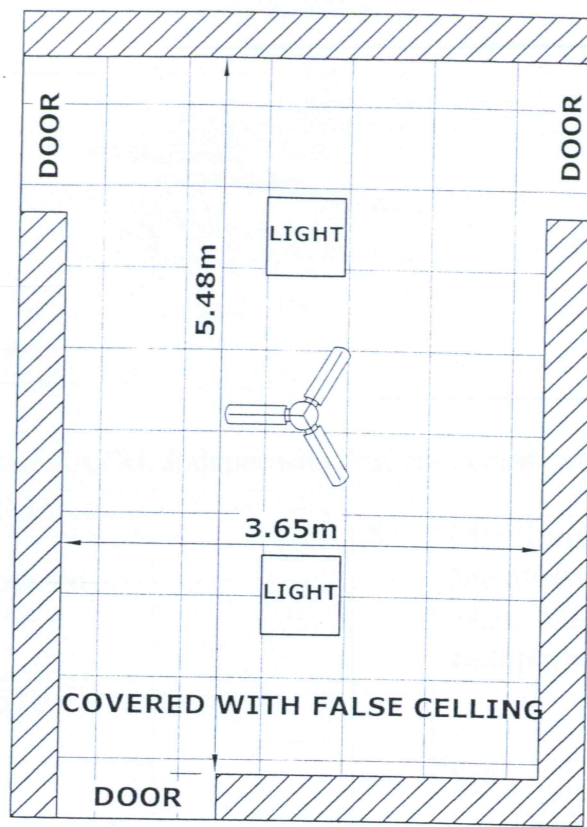

***Layout plan of Repair and Renovation of Lab
(False ceiling including LED Lights & Aluminium work for
covering of windows and ventilators of Biotechnology
lab) at Div.-III, ICAR- CAZRI, Jodhpur***